

Per the Illinois Compiled Statutes, 625 ILCS 5/11-208.6 Automated Traffic Law Enforcement System:


(k-7) A municipality or county operating an automated traffic law enforcement system shall conduct a statistical analysis to assess the safety impact of each automated traffic law enforcement system at an intersection following installation of the system. The statistical analysis shall be based upon the best available crash traffic and other date, and shall cover a period of time before and after installation of the system sufficient to provide a statistically valid comparison of safety impact. The statistical analysis shall be consistent with professional judgment and acceptable industry practice. The statistical analysis also shall be consistent with the data required for valid comparisons of before and after conditions and shall be conducted within a reasonable period following the installation of the automated traffic law enforcement system. The statistical analysis required by this subsection (k-7) shall be made available to the public and shall be published on the website of the municipality or county. If the statistical analysis for the 36-month period following installation of the system indicates that there has been an increase in the rate of accidents at the approach to the intersection monitored by the system, the municipality or county shall undertake additional studies to determine the cause and severity of the accidents, and may take any action that it determines is necessary or appropriate to reduce the number or severity of the accidents at that intersection.

A Red Light Running (RLR) Photo Enforcement System was installed at the intersection of 111th Street at Roberts Road on July 23, 2009, after finding limited success with other attempted measures to promote safer driving and improve compliance with traffic laws. The following statistical analysis was performed through 2015. Calendar year 2016 was not included as the Illinois Department of Transportation (IDOT) has not yet completed collecting all data. The statistical analysis will be updated annually, as collected data becomes available from IDOT.




111th Street at Roberts Road Palos Hills, IL

- RLR Photo Enforcement System monitors violations occurring on the southbound and westbound approaches of the intersection
- RLR Photo Enforcement System installed: July 23, 2009

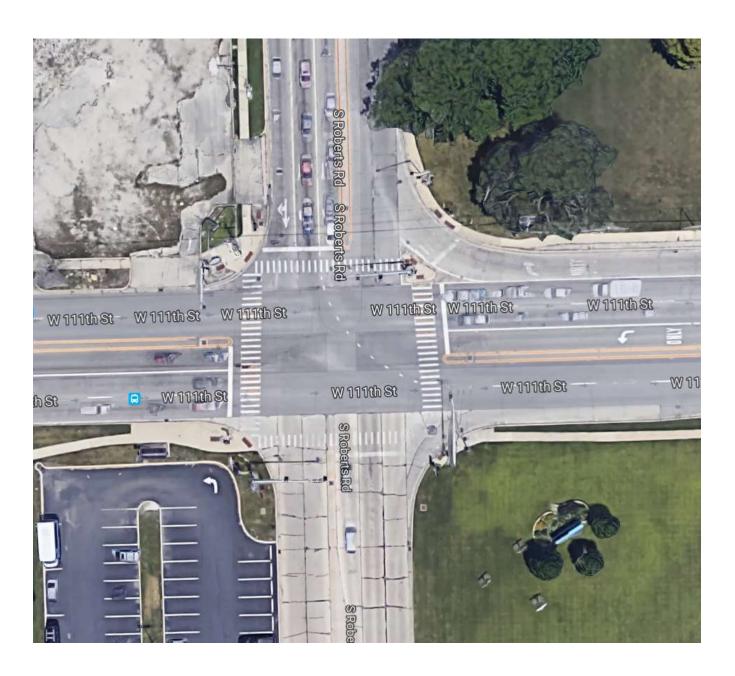



111th Street at Roberts Road, Northbound Approach

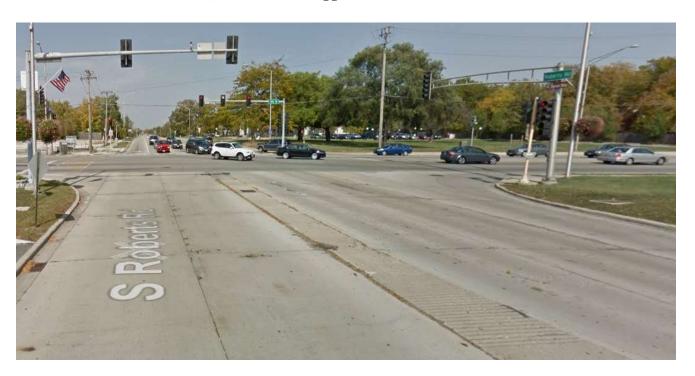

111th Street at Roberts Road, Southbound Approach





111th Street at Roberts Road, Eastbound Approach



111th Street at Roberts Road, Westbound Approach






Average Daily Traffic

Data was obtained from the Illinois Department of Transportation's website www.gettingaroundillinois.com.

111th Street at Roberts Road (Northbound)

• 2,400 (2014)

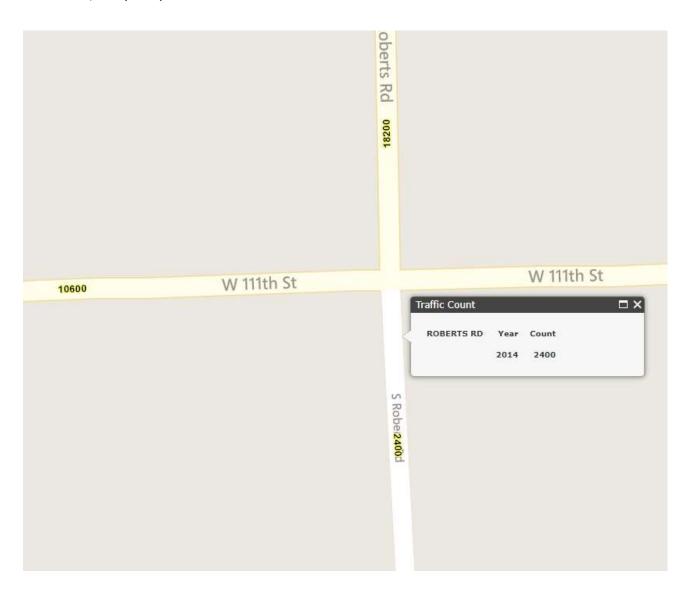




Average Daily Traffic (continued)

Data was obtained from the Illinois Department of Transportation's website www.gettingaroundillinois.com.

111th Street at Roberts Road (Southbound)

- 22,500 (2002)
- 21,000 (2006)
- 24,400 (2010)
- 18,200 (2014)

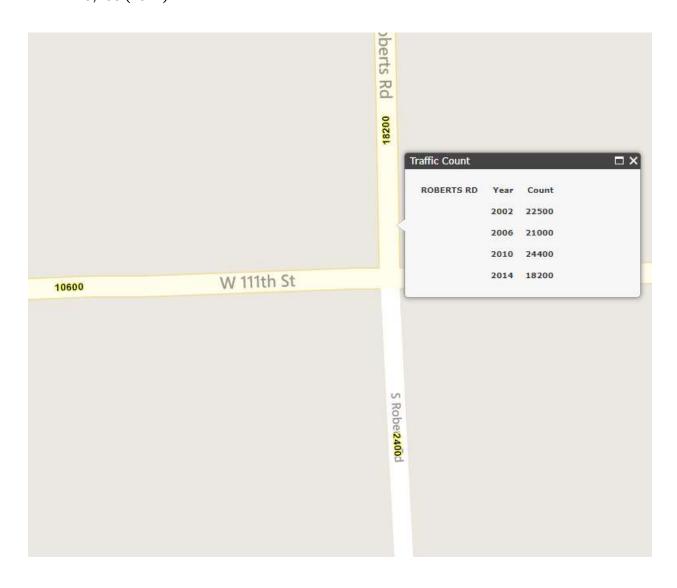




Average Daily Traffic (continued)

Data was obtained from the Illinois Department of Transportation's website www.gettingaroundillinois.com.

111th Street at Roberts Road (Eastbound/Westbound)

- 21,300 (2002)
- 20,900 (2006)
- 18,900 (2010)
- 10,600 (2014)

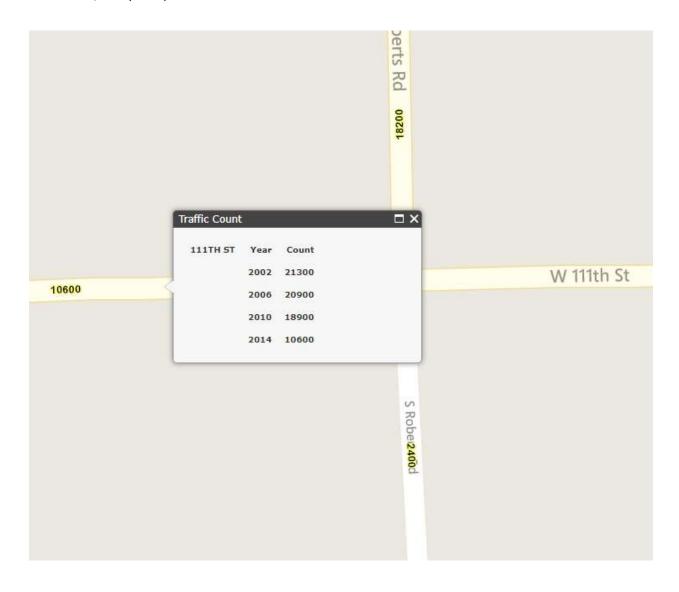



Crash History and Analysis

• Table 1 includes crash data obtained from the Illinois Department of Transportation, detailing angle, turning, rear-end, and other type crashes occurring at the intersection pre/post RLR Photo Enforcement System installation.

ALL INTERSECTION APPROACHES

	Crashes								
	Rear-End (% of		Angle (% of		Turning (% of		Other (% of		
	Tot	a1)	Tot	al)	Tota	al)	To	tal)	Tota1
2006	12	40.0%	0	0.0%	17	56.7%	1	3.3%	30
2007	16	44.4%	0	0.0%	16	44.4%	4	11.1%	36
2008	7	30.4%	1	4.3%	12	52.2%	3	13.0%	23
Total	35	39.3%	1	1.1%	45	50.6%	8	9.0%	89
2006-2008									
Average	11.7		0.3		15.0		2.7		29.7

RLR Camera Installation: July 23, 2009									
2009	6	40.0%	1	6.7%	8	53.3%	0	0.0%	15
2010	9	42.8%	1	4.8%	10	47.6%	1	4.8%	21
2011	9	47.4%	0	0.0%	8	42.1%	2	10.5%	19
2012	11	64.7%	0	0.0%	5	29.4%	1	5.9%	17
2013	12	80.0%	0	0.0%	3	20.0%	0	0.0%	15
2014	12	54.5%	0	0.0%	9	40.9%	1	4.5%	22
2015	7	43.7%	1	6.2%	6	37.5%	2	12.5%	16
Total	60	54.5%	2	1.8%	41	37.3%	7	6.4%	110
2010-2015									
Average	10.	0	0.	3	6.	8	1	2	18.3

• Other indicates the following: Pedestrian, Pedal Cyclist, Fixed Object, Sideswipe, Head-On and Unknown

Table 1

DISCLAIMER: The motor vehicle crash data referenced herein was provided by the Illinois Department of Transportation, based upon information derived from multiple sources. Any conclusions drawn from analysis of the aforementioned data are the sole responsibility of the data recipient(s). Additionally, for coding years 2015 to present, the Bureau of Data Collection uses the exact latitude/longitude supplied by the investigating law enforcement agency to locate crashes. Therefore, location data may vary in prior years, since the data prior to 2015 was physically located by bureau personnel. Given the subjective nature of the reporting process, the modifications in the incident locating protocols and the changes to the crash reporting thresholds effective 2009, the City of Palos Hills acknowledges the potential for discrepancies in the final conclusions drawn.



Crash History and Analysis (continued)

• Table 2 includes crash data obtained from the Illinois Department of Transportation, detailing angle, turning, rear-end, and other-type crashes occurring at the intersection on the southbound and westbound approaches only, pre/post RLR Photo Enforcement System installation.

SOUTHBOUND/WESTBOUND APPROACHES ONLY (PHOTO ENFORCED APPROACHES)

	Crashes								
	Rear-End (% of		Angle (% of		Turning (% of		Other (% of		
	Tot	al)	Tot	al)	Tota	al)	To	tal)	Total
2006	5	21.7%	0	0.0%	17	73.9%	1	4.3%	23
2007	13	44.8%	0	0.0%	13	44.8%	3	10.3%	29
2008	6	28.6%	1	4.8%	11	52.4%	3	14.3%	21
Total	24	32.9%	1	1.4%	41	56.2%	7	9.6%	73
2006-2008									
Average	8.0		0.3		13.7		2.3		24.3

RLR Camera Installation: July 23, 2009									
2009	5	35.7%	1	7.1%	8	57.1%	0	0.0%	14
2010	4	25.0%	1	6.2%	10	62.5%	1	6.2%	16
2011	3	30.0%	0	0.0%	7	70.0%	0	0.0%	10
2012	9	60.0%	0	0.0%	5	33.3%	1	6.7%	15
2013	9	75.0%	0	0.0%	3	25.0%	0	0.0%	12
2014	10	52.6%	0	0.0%	8	42.1%	1	5.3%	19
2015	6	50.0%	0	0.0%	5	41.7%	1	8.3%	12
Total	41	48.8%	1	1.2%	38	45.2%	4	4.8%	84
2010-2015									
Average	6.8	8	0.	2	6	3	0	.7	14.0

[•] Other indicates the following: Pedestrian, Pedal Cyclist, Fixed Object, Sideswipe, Head-On and Unknown

Table 2

DISCLAIMER: The motor vehicle crash data referenced herein was provided by the Illinois Department of Transportation, based upon information derived from multiple sources. Any conclusions drawn from analysis of the aforementioned data are the sole responsibility of the data recipient(s). Additionally, for coding years 2015 to present, the Bureau of Data Collection uses the exact latitude/longitude supplied by the investigating law enforcement agency to locate crashes. Therefore, location data may vary in prior years, since the data prior to 2015 was physically located by bureau personnel. Given the subjective nature of the reporting process, the modifications in the incident locating protocols and the changes to the crash reporting thresholds effective 2009, the City of Palos Hills acknowledges the potential for discrepancies in the final conclusions drawn.



Comparison of annual averages shows the total number of crashes decreasing by 38.4% at the intersection for all approaches and by 42.4% on the southbound and westbound (photo enforced) approaches post-camera installation.

The US Department of Transportation Project Development and Design Manual states that turning, angle or head-on crashes have a number of probable crash causes, to include:

- Large volumes of left /right turns
- Large total intersection volume
- Excessive speed on approaches
- Inadequate traffic control devices
- Poor visibility of signals

While red light cameras cannot truly decrease the volume of cars entering the intersection, speed and proximity of vehicles entering an intersection or the amount of turning traffic volume, red light cameras and red-light camera photo enforcement warning signs have the ability to reduce traffic crashes and improve compliance with traffic control devices.



Adjudication Experience

RLR camera violations are contested and adjudicated through an administrative hearing conducted each month. Adjudication data for the City's Automated Enforcement Program is shown below in Table 3. Data compiled is not intersection specific, rather totals for the program as a whole.

CITY OF PALOS HILLS ADJUDICATION FOR							
AUTOMATED PHOTO ENFORCEMENT PROGRAM							
YEAR / TOTALS LIABLE NOT LIABLE							
2008	2	0					
2009	613	18					
2010	790	30					
2011	642	45					
2012	831	65					
2013	537	40					
2014	447	33					
2015	579	45					
2016	454	25					
2017	279	17					
YEAR TO DATE TOTAL:	5,174	318					

^{*}Adjudication data provided thru August 2017

Table 3

The high-quality video footage and photographic evidence produced by the enforcement system is a contributing factor in a majority of the contested RLR violations being upheld by the Hearing Officer. The police officers assigned to review and approve/reject potential violations are vigilant in applying the same officer discretion and criteria they would if issuing an in-person citation, resulting in only highly prosecutable violations being mailed out.